
Setup Instructions - v1		RE-1576		
Order #:	Distributor:		Client:	

Total output Max. 10A

3. Max standby power: 0.5W

## Controlling the RGB LED lights Static Mode: Function of Keys 1. Use the Color Ring key to select a color. 2. Saturation is controlled with W/R/G/B keys. 3. White mode is available by long-pressing 'ON' key. 4. Colors (not white) are dimmable with the Brightness key. Q Color Ring Indicator Dynamic Mode: Press "M" key to cycle through the following options: Brightness -Brightness + 1. White light fades in and out. 2. Several colors fade in and out. 3. R.G.B three colors fade in and out. Master OFF Master ON 4. R,G,B three colors flash. 5. Six colors flash. 6. Random color flashes. 7. Red color fades in and flashes. 8. Green color fades in and flashes. Mode (M) 9. Blue color fades in and flashes. To Pair a Remote with Multiple Units: 1. Power on the lights. 2. Press 'ON' key within 3 seconds. Red +/-3. Lights will blink when link is made. To unpair: Long press 'ON' key within 3 seconds after switching on lights. Specifications: Receiver: Remote Control: Remotes can be paired with one or more receivers. 2. Output: Max. 6A/Channel Standby power: <20uA Transmitting power: 6dBm




Different receivers can work synchronously even

when started at different times (within 30 min).

## Steps:

1) Connect power cords to LED Lights in Counters, as shown.

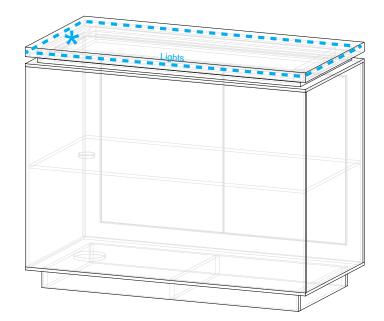

RE-1576